

LIVELLO COLLECTION

ACOUSTICAL WALL & CEILING PANELS



L400


HIGH ABUSE WALL PANELS

L400 Wall Panels are manufactured specifically as high abuse sound absorber panels that offer both excellent sound absorption and high durability. Applications include gymnasiums, schools, correctional facilities, recreation centers and any area where excess reverberation and abuse resistance is required.

L400 High-Abuse Wall Panels are constructed using a high impact $\frac{1}{16}$ " thick perforated co-polymer underlayment laminated over a 1" or 2" thick 6-7# PCF fiberglass absorber core. Panels are available in $1\frac{1}{16}$ " and $2\frac{1}{16}$ " thickness with sizes up to 4' x 10'.

Gymnasiums
Schools & Universities
Hallways & Corridors
Recreation Centers
Fitness Centers

AKOUO
acoustics

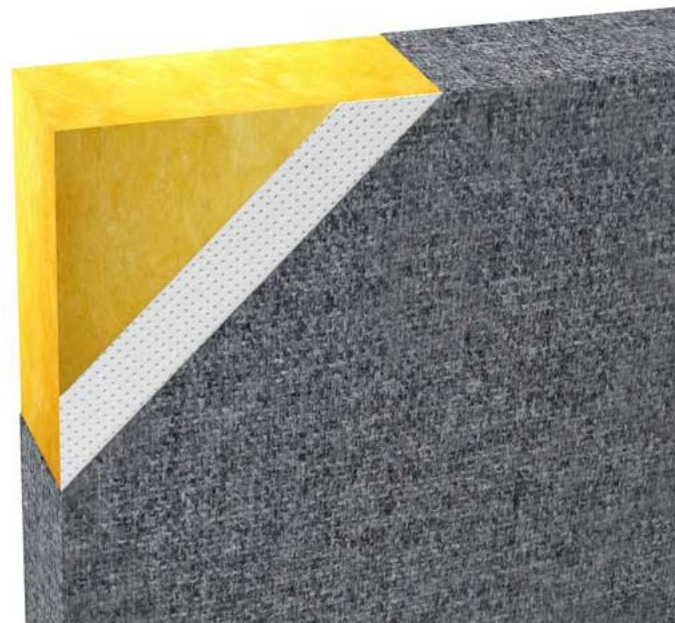

LIVELLO COLLECTION

ACOUSTICAL WALL & CEILING PANELS



FEATURES

- Tough, Durable Panels
- Excellent Acoustical Performance
- Class A Fire Rated
- Standard or COM Fabrics
- Various Installation Options
- Custom Sizes and Shapes

TEXTILES

- Guilford of Maine: FR701 & Anchorage
- COM (must meet manufacturing requirements)

ACOUSTICS

Thickness	1 1/16"	2 1/16"
NRC Rating	.80 – .90	1.05 – 1.15

DIMENSIONS

Sizes: up to 4' x 10'

Thickness: 1 1/16" or 2 1/16"

SUBSTRATE

1/16" thick perforated co-polymer underlayment laminated to 6-7# PCF rigid fiberglass absorber core

FIRE RATING

All components have a Class A fire rating per ASTM E-84

INSTALLATION OPTIONS



Rotofast Anchors




Impaling Clip



2-Part Mechanical Clips

EDGE STYLES



Square

AKOUO
acoustics

AKOUO-ACOUSTICS.COM
a division of Sedia Systems